



EXT3L

Dry contact module

500 W - 433 MHz



MAKING YOUR EVERYDAY LIFE EASIER

Control your gate motor drive or open your side gate remotely with this Extel Casa module. This module has a dry contact output (NO/COM), which is ideal for controlling your gate. Its design allows it to be fitted into a flush-mounted box.

* Supports up to 500 W (resistive load)

** Up to 50 metres in open space



HOTLINE

2 YEARS

WARRANTY

CASA



EASY TO INSTALL

- Simple installation in a flush-mounted box.
- Timed/manual: the switch can be operated manually (ON/OFF) or in timed mode, switching OFF after 1 second, 5 seconds or 2 minutes.
- 433.92 MHz radio control using the switch (ref. 701207 not included).



IDEAS FOR USE AT HOME...




Gate motor drive: Control via the gate motor drive's dry contact.

Outdoor lighting: Switch on lights.

Electric strike plate: Time-delayed activation for the side gate.

HOW DOES IT WORK?

- Install the dry contact module near the device to be controlled.
- Fit the switch (ref. 701207, not included) in the desired position.
- Pair the switch with the dry contact module.

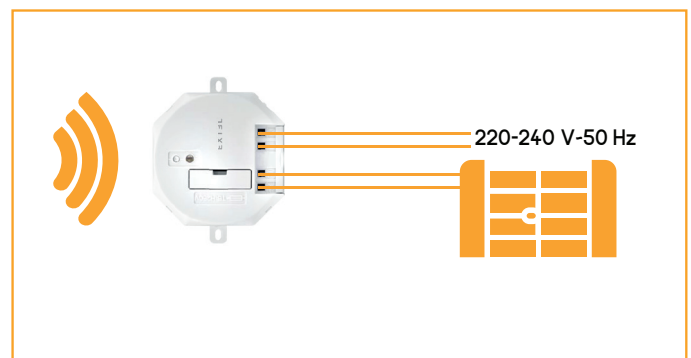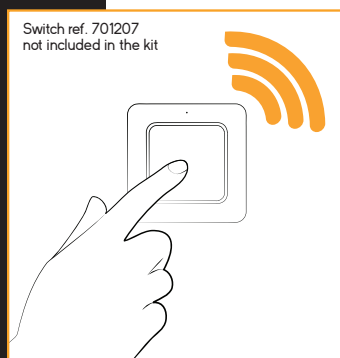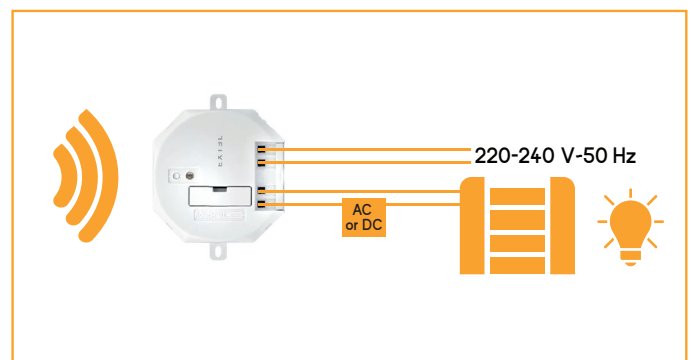

COMPLETE YOUR INSTALLATION WITH THE RANGE **EXT3L** CASA

Simply control your lighting and electrical appliances... from a remote control!
Find out about our full range on our website www.avidsen.com and discover how to make your home easier and more intuitive.



TECHNICAL FEATURES DRY CONTACT MODULE



INSTALLATION	Flush-mounted
FREQUENCY	Receiver: 433.92 MHz
PERMISSIBLE OUTPUT LOAD	500 W (resistive load)
USE	Indoor
FUNCTION	Manual: ON/OFF Dry contact delay: OFF after 1 second, OFF after 5 seconds, OFF after 2 minutes
POWER SUPPLY	220 V-240 V -50 Hz
DIMENSIONS	Height 53 mm x Width 53.7 mm x Depth 27 mm
WEIGHT	56 g
OPERATING TEMPERATURE RANGE	-15 to 35°C
STANDARD AND CERTIFICATION	CE, RoHS



PRODUCT CONTENT

- 1 dry contact module

CASA

REF. 701103



3345117011035

EXT3L

