



EXT3L

1000 W lighting module kit

With switch



CONTROL YOUR LIGHTS FROM THE TIPS OF YOUR FINGERS

Control your lighting with this Extel Casa light module, which is fitted to your lamp cord for easy control of your light fixture. Compatible with the main light bulbs on the market, it controls your lights via the wireless switch included in the kit.

* Supports up to 1000 W (resistive load)

** Up to 50 metres in open space



HOTLINE

2 YEARS


WARRANTY

CASA



EASY TO INSTALL

- Flush-mount installation. Once plugged in, simply pair it with the Extel Casa switch included in the kit. It is powered by a CR2032 battery (included) and can be attached wherever you like.
- Reliable radio range: up to 50 metres in open space.
- Compatible with several types of light bulbs available on the market: LEDs, compact fluorescent, halogen and incandescent.
- ON/OFF switch or OFF switch with a delay of 5 seconds, 1, 10, 30 or 60 minutes.
- Compatible with wireless remote controls and switches from the Extel Casa range.
- Up to 32 transmitters linked to the lighting module: you can add more control points (hallway, living room, bedroom, etc.).

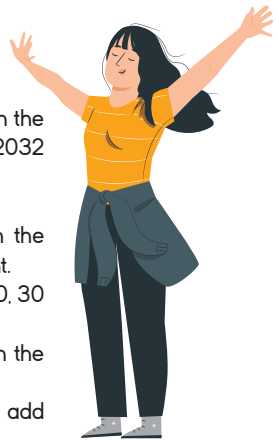

50m**

433 Mhz


1000 W*



IDEAS FOR USE AT HOME...

Living room: easily switch the ceiling light on and off from the doorway.

Dining room: control the main lighting discreetly.

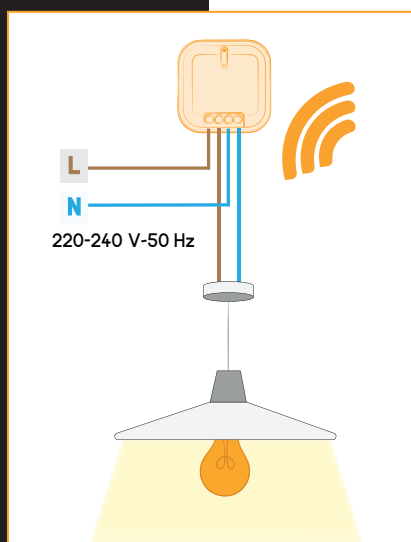


HOW DOES IT WORK?

- Fit the light module into the ceiling light behind your light fixture.
- Fit the switch in the desired position.
- Connect the switch to the lighting module.



COMPLETE YOUR INSTALLATION WITH THE RANGE **EXT3L** CASA

Simply control your lighting and electrical appliances... from a remote control!
Find out about our full range on our website www.avidsen.com and discover how to make your home easier and more intuitive.

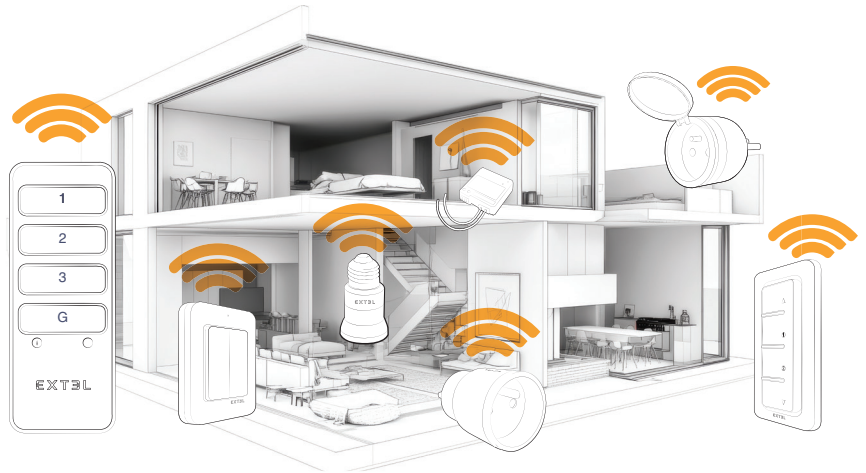

COMPATIBLE

-  INC. 1000 W
-  LED 200 W
-  HALO. 1000 W
-  ECO. 100 W

TECHNICAL CHARACTERISTICS - LIGHTING MODULE

INSTALLATION	Flush-mounted
FREQUENCY	Receiver: 433.92 MHZ
MAX. POWER	1000 W (resistive load)
USE	Indoor
MAX. POWER	Incandescent: 1000 W LED: 200 W Halogen: 1000 W Compact fluorescent: 100 W Not compatible with dimmable bulbs/lamps.
DIMENSIONS	Height 47 mm x Width 47 mm x Thickness 24.5 mm
WEIGHT	20 g
OPERATING TEMPERATURE RANGE	0 to 35°C
STANDARD AND CERTIFICATION	CE, RoHS

TECHNICAL SPECIFICATIONS - SWITCH

DISTANCE	50 m in open space
FREQUENCY	433.92 MHZ
MAX RADIO POWER	ERP 10 dBm
USE	Indoor
OPERATION	ON/OFF or with a delayed OFF function of 5 seconds, 1 minute, 10 minutes, 30 minutes or 60 minutes. Red and green LED indicators show the various operating states. The switch has a low-battery indicator.
POWER SUPPLY	Runs on one 3 V CR2032 battery (included).
INSTALLATION	Surface mounted
DIMENSIONS	Height 80 mm x Width 80 mm x Thickness 15 mm
WEIGHT	60 g
OPERATING TEMPERATURE RANGE	0 to 35°C
STANDARD AND CERTIFICATION	CE, RoHS



PRODUCT CONTENT

- 1 lighting module
- 1 transmitter switch (CR2032 battery included)
- 1 mounting kit


CASA

REF. 701204



3345117012049

EXT3L

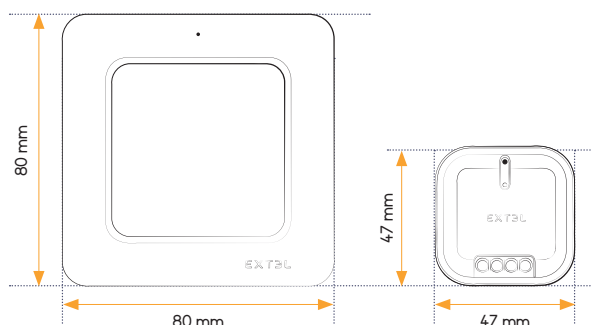

Photographs and illustrations not contractually binding / ©AdobeStock.com / Extel is a brand of the Avidsen group.
Avidsen reserves the right to change the technical specifications, dimensions and colours of the products in the current offer without notice. © Extel France 2026