



EXT3L

Outdoor lighting module kit

1000 W - With switch and IP56-rated waterproof box



50m**



433 Mhz



1000 W*



3V CR2032



ON/OFF



IP56



SIMPLE EXTERNAL CONTROL SYSTEM

Control your outdoor lighting from inside your home with the Extel Casa switch and lighting module to make your everyday life easier. The box included in the kit allows you to install it safely outdoors. Several remote controls and switches can be connected to it, giving you complete freedom of control!

* Supports up to 1000 W (resistive load)

** Up to 50 metres in open space



HOTLINE

2 YEARS

WARRANTY

CASA



EASY TO INSTALL

- Installation in an IP56-rated waterproof box: Once plugged in, simply pair it with the Extel Casa switch included in the kit. The switch is powered by a CR2032 battery (included) and can be attached wherever you like.
- Reliable radio range: up to 50 metres in open space.
- Compatible with several types of light bulbs available on the market: LEDs, compact fluorescent, halogen and incandescent.
- ON/OFF switch or OFF switch with a delay of 5 seconds, 1, 10, 30 or 60 minutes.
- Compatible with wireless remote controls and switches from the Extel Casa range.
- Up to 32 transmitters linked to the lighting module: you can add more control points (hallway, living room, bedroom, etc.).




IDEAS FOR USE AT HOME...

Garden: easily switch your garden lights on and off from inside your home.




HOW DOES IT WORK?

- Install the lighting module in its IP56-rated box behind your outdoor light fixture.
- Fit the switch in the desired location.
- Connect the switch to the lighting module.

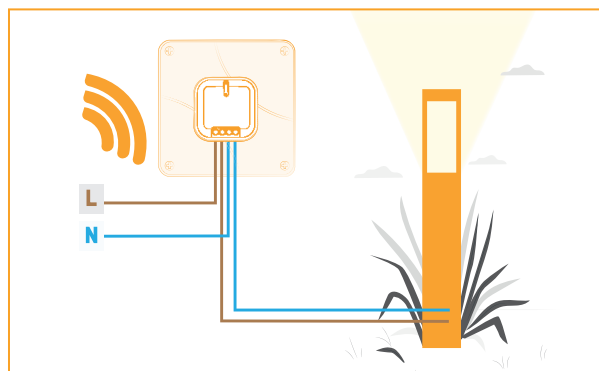

COMPLETE YOUR INSTALLATION WITH THE RANGE **EXT3L** CASA

Simply control your lighting and electrical appliances... from a remote control!
Find out about our full range on our website www.avidsen.com and discover how to make your home easier and more intuitive.

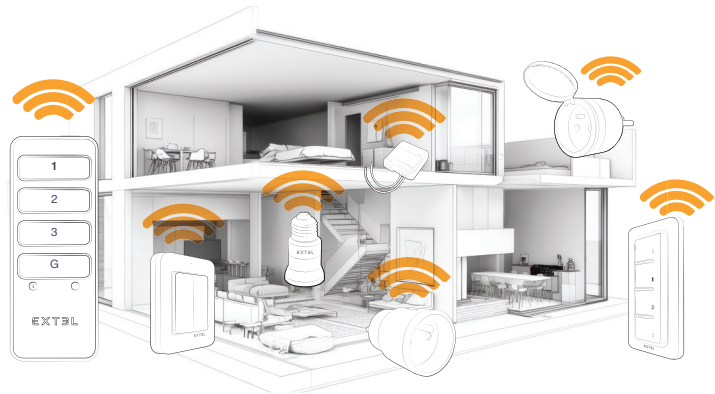

COMPATIBLE

- INC. 1000 W
- LED 200 W
- HALO. 1000 W
- ECO. 100 W



TECHNICAL CHARACTERISTICS - LIGHTING MODULE


INSTALLATION	Flush-mounted
FREQUENCY	Receiver: 433.92 MHz
MAX. POWER	1000 W (resistive load)
MAX. POWER	Incandescent: 1000 W LED: 200 W Halogen: 1000 W Compact fluorescent: 100 W Not compatible with dimmable bulbs/lamps.
DIMENSIONS	Height 47 mm x Width 47 mm x Thickness 24.5 mm
WEIGHT	20 g
OPERATING TEMPERATURE RANGE	0 to 35°C
STANDARD AND CERTIFICATION	CE, RoHS

TECHNICAL SPECIFICATIONS - SWITCH

DISTANCE	50 m in open space
FREQUENCY	433.92 MHz
MAX RADIO POWER	ERP 10 dBm
USE	Indoor
OPERATION	ON/OFF or with a delayed OFF function of 5 seconds, 1 minute, 10 minutes, 30 minutes or 60 minutes. Red and green LED indicators show the various operating states. The switch has a low-battery indicator.
POWER SUPPLY	Runs on one 3 V CR2032 battery (included).
INSTALLATION	Surface mounted
DIMENSIONS	Height 80 mm x Width 80 mm x Thickness 15 mm
WEIGHT	60 g
OPERATING TEMPERATURE RANGE	0 to 35°C
STANDARD AND CERTIFICATION	CE, RoHS

TECHNICAL SPECIFICATIONS - IP56 BOX

INSTALLATION	Wall
PROTECTION RATING	IP56
DIMENSIONS	Height 115 mm x Width 115 mm x Thickness 49.3 mm
WEIGHT	203 g

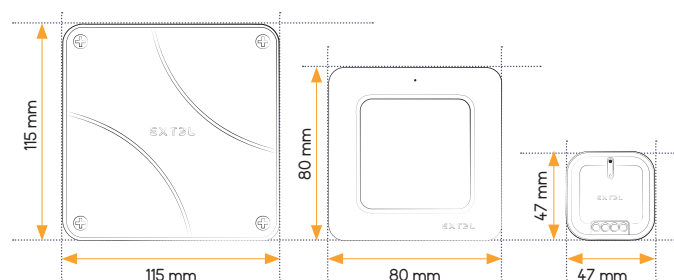

PRODUCT CONTENT

- 1 lighting module
- 1 IP56-rated waterproof box
- 2 cable glands
- 1 transmitter switch (CR2032 battery included)
- 1 mounting kit

CASA

REF. 701206



3345117012063

EXT3L

Photographs and illustrations not contractually binding / ©AdobeStock.com / Extel is a brand of the Avidsen group.
Avidsen reserves the right to change the technical specifications, dimensions and colours of the products in the current offer without notice. © Extel France 2026